


The membrane keyboards have a wide range of applications for their characteristics which **maximise their customisation possibilities** in terms of shape with the minimum encumbrance, a light pressure put on the contact closure in a precise and reliable way.

The customisation takes advantage of a transparent window, inserted in a snap dome and micro led, the surface can be thermoformed with a hot deformation to meet the desired profile.

The connection is supplied by a flat cable, 2.54 inc. which is standard or 1.27 inc. on request. Resin surfaces, braille, EMI screens and/or electrostatic are other characteristics which are obtainable.

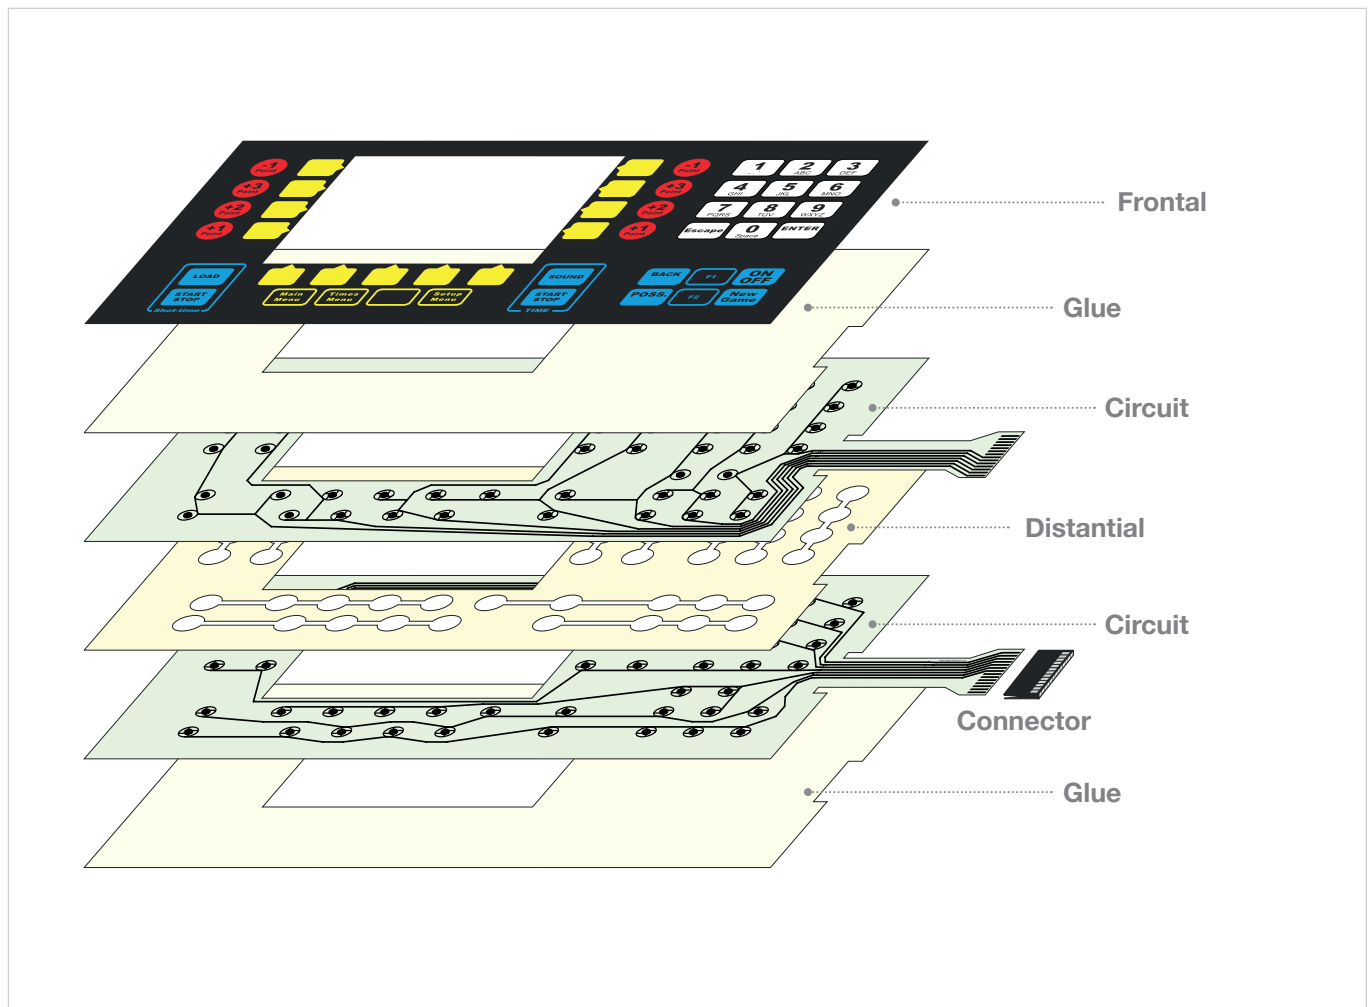

Temperature resistance: **-30°C + 70°C**
Duration: **Over 1.000.000 realisations**
Isolation resistance: **Over 500 Kohm**
Closure resistance: **Less Than 100 Ohm**
Maximun usage tension: **50 mA**